


Owner's Installation Manual

GPS Receiver Wiring Layout

Part Number: 105-979250 (GPS Receiver)

GPS RECEIVER

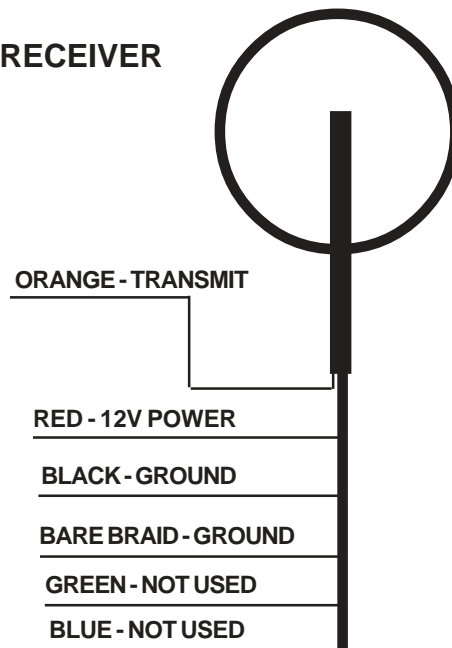

GPS RECEIVER INSTALLATION

1. For **BEST** results the GPS receiver should be mounted above deck. Should it be necessary to mount the receiver in another location it must be mounted in a position that allows the GPS signal to pass through fiberglass only, the signal cannot pass through wood or metals.
2. Connect the **ORANGE** wire to the speedometer heads white wire.
3. Connect the **RED** wire to a 12 volt power source (if wired to continuous power - GPS will not have to initialize with the satellite each time).
4. Connect the receiver **BLACK** lead to battery ground.
5. Connect the **BARE BRAID** to vessel ground.
6. Both the **GREEN** and **BLUE** wires are not used with the GPS speedometer head. These wires should be taped off and secured.

NOTE: We recommend that the receiver be powered up for approximately 48 hours (before the unit sits idle for no more than a 180 day period) to charge the internal battery.